

$$k := 1.3806503 \cdot 10^{-23}$$


Boltzmann's constant.

$$T_{\text{sys}} := 0, 1 \dots 290$$

System noise temperature.

$$N_{0\text{dB}}(T_{\text{sys}}) := 10 \log(k \cdot T_{\text{sys}})$$

Noise power spectral density in dB

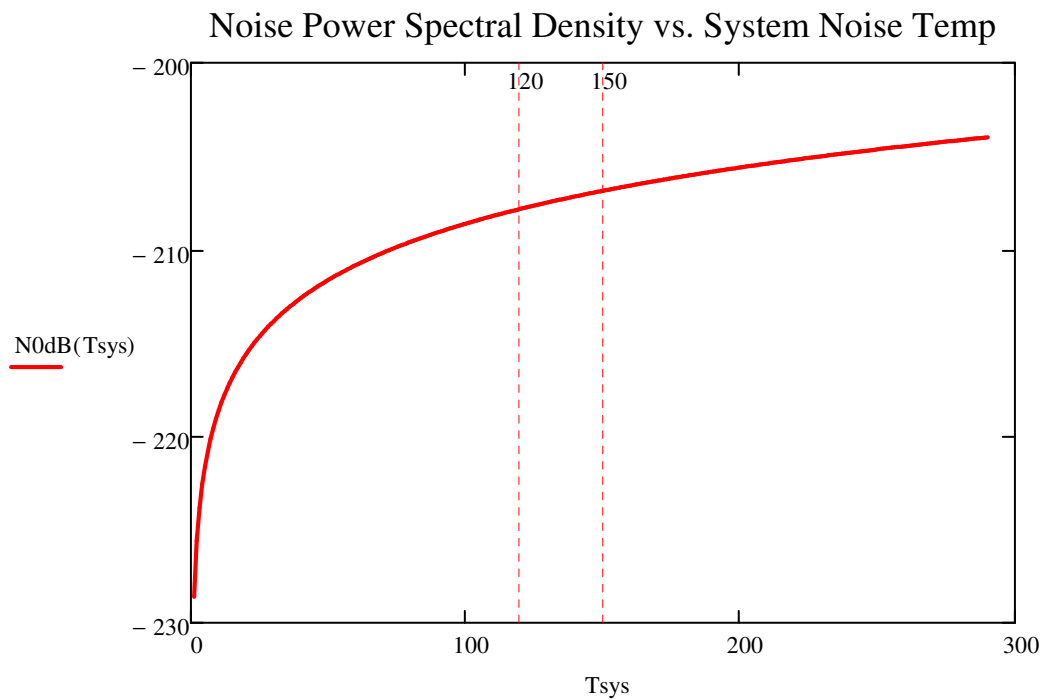

Receive noise temperature in the expected range of 120K to 150K gives the following spectral noise densities in dB.

$$N_{0\text{dB}}(120) = -207.807 \times 10^0$$

$$N_{0\text{dB}}(150) = -206.838 \times 10^0$$

SdB := -142 Assuming 20W RF power at spacecraft, 18dB gain at spacecraft, 195dB path loss, and 22dB gain at ground station. This is RF flux in dB.

EbN0 := 3 Required Eb/N0 for the voyager code.

N0dB := -206, -207 .. -208 Range of interest given $150 > T_{sys} > 120$


BRdB(N0dB) := SdB - N0dB - EbN0 Bit rate in dB

$$BR(N0dB) := 10^{\left(\frac{BRdB(N0dB)}{10}\right)} \quad \text{Bit rate in Hz}$$

Marked on the graph below are the data rates expected given receive system noise temperatures of 150K to 120K.

At 150K, the bit rate is $BR(-206.838) = 1.527 \times 10^6$

At 120K, the bit rate is $BR(-207.807) = 1.909 \times 10^6$

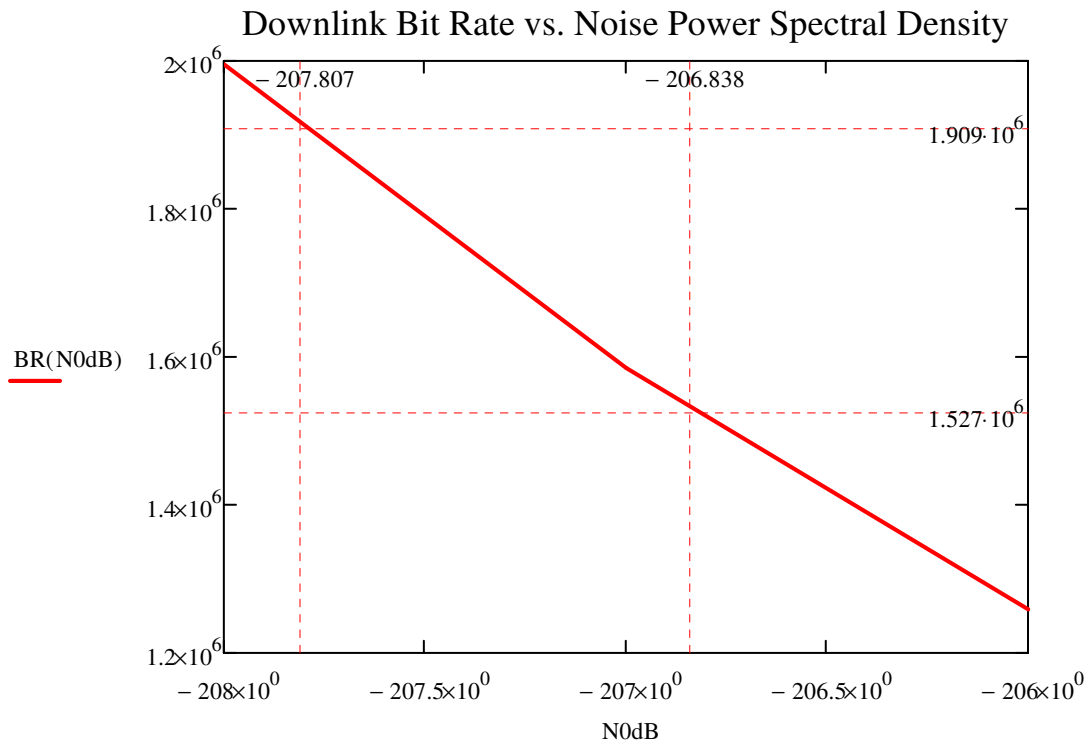

Receive bandwidth is 3400-3410 MHz.

An evaluation of the capacity of the downlink is as follows. Assume 15kHz per user for voice. This includes a generous amount for a quality vocoder as well as the overhead for that vocoder. 15kHz per user goes into a data rate of 1.5 Mbps one hundred times, for a capacity of 100 simultaneous voice users, if the system noise temperature is 150K and the assumptions given above concerning the receive RF flux are true.

$$\frac{1.5 \cdot 10^6}{15 \cdot 10^3} = 100 \times 10^0$$

For a bit rate of 15kbps, using 8ary FSK, that is 5ksymbols/second. Every three bits is represented as one tone.

Tone would last for 200 microseconds. To be continued. Comments and feedback requested.

